



Low Flow Impact Cleaning

Toftejorg TZ-89 Rotary Jet Head

PD 66401 GB1 2003-08


Application

The Toftejorg TZ-89 rotary jet head provides 360° indexed impact cleaning over a defined time period. It is automatic and represents a guaranteed means of achieving quality assurance in tank cleaning. Suitable for processing, storage and transportation tanks and vessels between 0.5 and 50 m³ (130 to 13,000 US gallons), the device is used in breweries, food, dairy and pharmaceutical processes and many other industries. The Toftejorg TZ-89 is particularly suitable for industries using solvent cleaning in applications where very low flows are preferred but 360° impact cleaning is still needed, e.g. in the pharmaceutical industry.


Working Principle

The flow of the cleaning fluid makes the nozzles perform a geared rotation around the vertical and horizontal axes. In the first cycle, the nozzles lay out a coarse pattern on the tank surface. The subsequent cycles gradually make the pattern more dense, until a full pattern is reached after 8 cycles. The drive mechanism is located outside the tank or process equipment, leaving a minimum of parts to be submerged into the product. All product contact surfaces are 1.4404 (316L) stainless steel.

Cleaning Pattern



First cycle



Full pattern

The above drawings show the cleaning pattern achieved on a cylindrical horizontal vessel. The difference between the first cycle and the full pattern represents the number of additional cycles available to increase the density of the cleaning.

Standard Design

Special versions include Tri-Clamp connections and ultra-low flow with fast rotation. As standard documentation, the Toftejorg TZ-89 can be supplied with a "Declaration of Conformity" for material specifications.

Materials

1.4404 (316L), 1.4401 (316), SAF 2205 (UNS 31803), PTFE, PVDF, PEEK, FEP/Silicone



Technical Data

Weight:	7 kg (15 lbs)
Lubricant:	Self-lubricating with the cleaning fluid
Working pressure:	2 - 7 bar (30 - 100 psi)
Recommended pressure:	3 - 6 bar (44 - 87 psi)
Max. working temperature:	95 °C (203 °F)
Max. ambient temperature:	140 °C (284 °F)
Max. throw length:	4 - 7 m (13 - 23 ft)
Impact throw length:	2.5 - 4 m (8 - 13 ft)
Inlet connections:	Thread: 3/4" BSP or NPT, male Clamp: 1" ISO 2852
Tank connection:	Flange: 50 ND6 DIN 2501, or 3" ANSI B 16.5 Clamp: 3" ISO 2852


Ordering

Please specify nozzle size and required connections and confirm application suitability.


Options

- Electronic rotation sensor to verify 360° coverage


Flow Rate

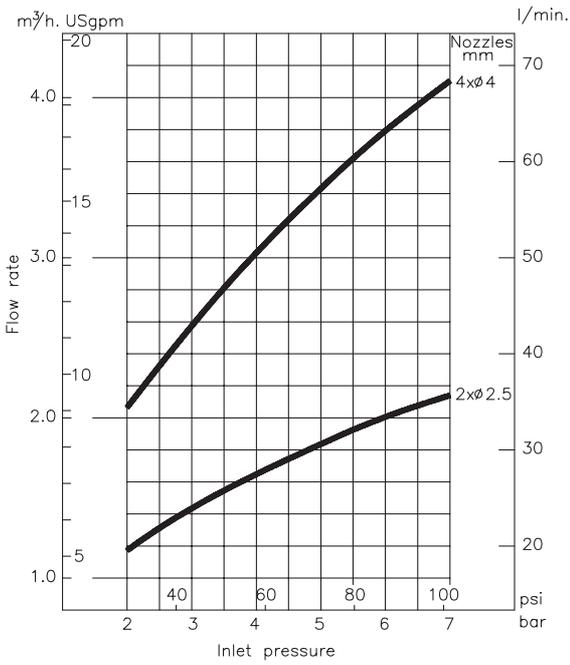


Impact Throw Length

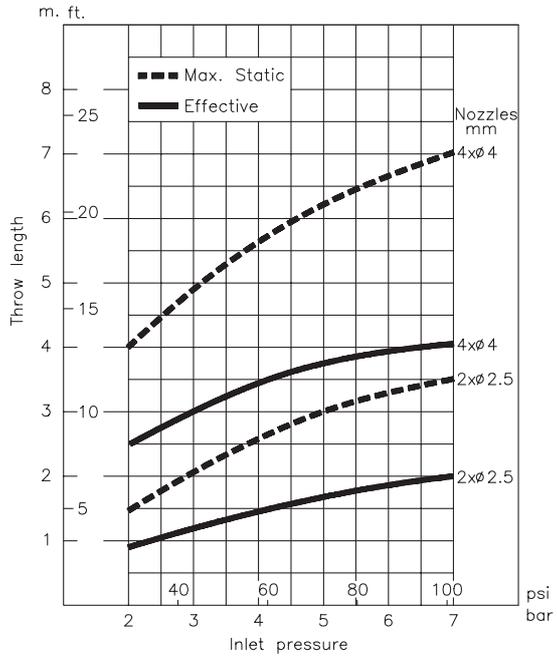

Dimensions (mm)

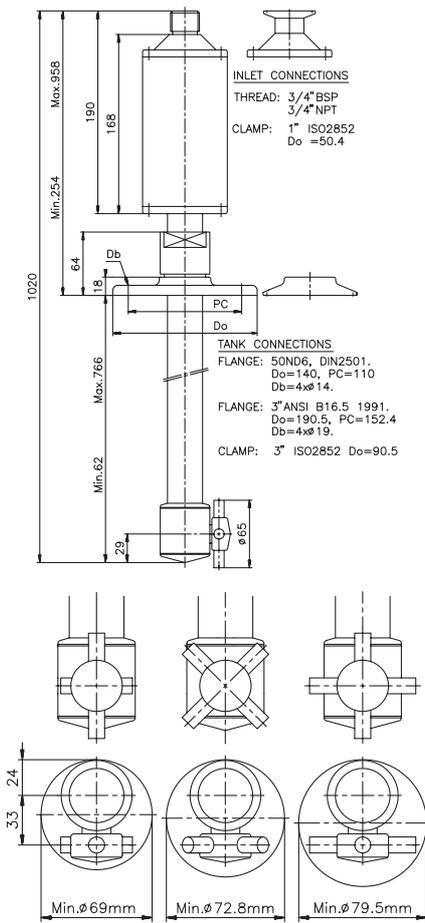

Cleaning Time, Complete Pattern

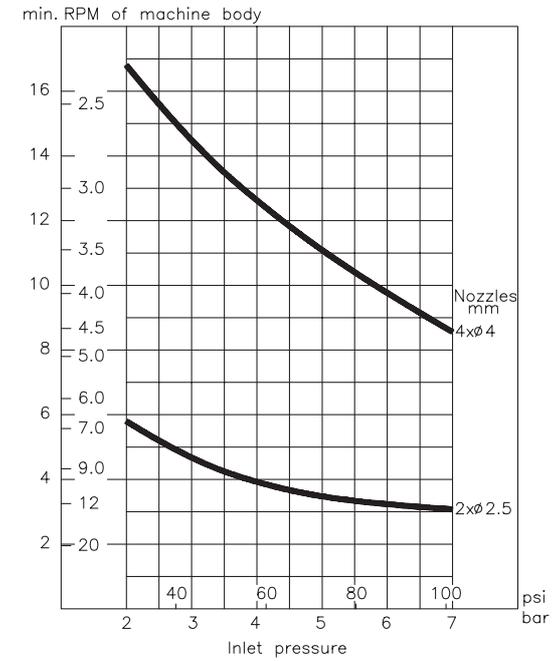

PD 66401 GB1 2003-08

The information contained herein is correct at the time of issue, but may be subject to change without prior notice.

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com or www.toftejorg.com to access the information direct.